






#### Technical information

Class	II
Power	17,5W
Intensity	1590 lm
Breaking Strength	IK 08
Protection Rating	IP65
Percentage of Light Output (upwards)	0
Electrical Connection	230V 50Hz


#### Colour code

	02 (Goffered white)
	06 (Goffered anthracite)
	09 (Ancient bronze)


#### Features of the product

Body and handle realized in AISI 430 stainless steel.  
Painting with epoxy powder bottom and final painting in polyester.  
5mm sandblasted flat tempered glass cover.  
A4 stainless steel screws.  
Product supplied with one power supply cable 5m in length.  
Product with no visible screws.

## Technical drawing

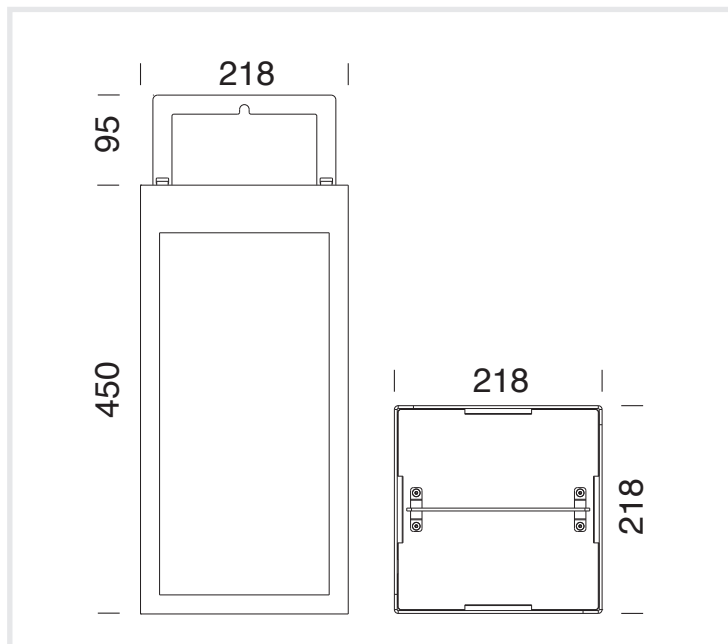

## Photometric data



94 14 869

401,00 cd/klm

## Isolux curves

Values related to 4000K version. The values for 3000K version are -8,8% lower

## Accessories

**boada**GRUP

SEGURETAT  
ENERGIA  
R+D+I

P.A.E. d'Osona C. Tarragona 14  
08500 Vic (Barcelona)  
T 93 886 01 76 F 93 889 02 25  
comercial@mboada.com

[www.mboada.com](http://www.mboada.com)